

INSTALLATION INSTRUCTIONS (2-1/16") ELECTRICAL GAUGES


WATER RESISTANT OFF ROAD/MARINE

Boost Gauge

Mounting


Gauge can be mounted in a 2-1/16" (52mm) panel hole or gauge pod. If installing in a panel, secure the gauge by spinning on the mounting bracket from the back of the gauge.

Spin on mounting bracket

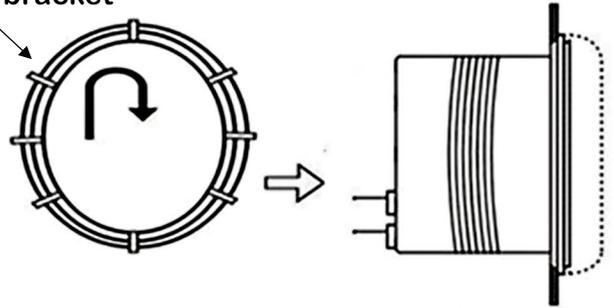

BOTTOM VIEW

BACK VIEW

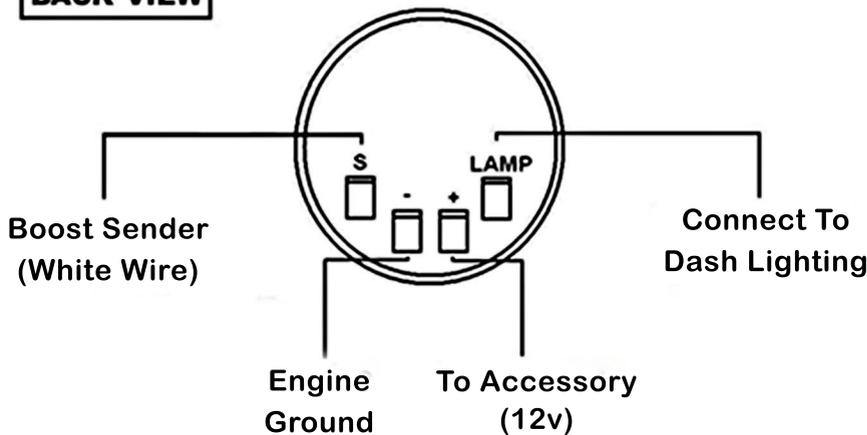

Cut boost line and install supplied plastic "T" fitting. Connect "T" fitting to the in-line filter with supplied hose. Then connect in-line filter to sender with supplied hose.

**The filter is used to keep debris out of the sender. Not using it will shorten the life of the sender.

