




For additional install information please visit www.p3gauges.com/install

BG2X Vent Install



1 Use a small screwdriver or pry tool to release vent trim clips

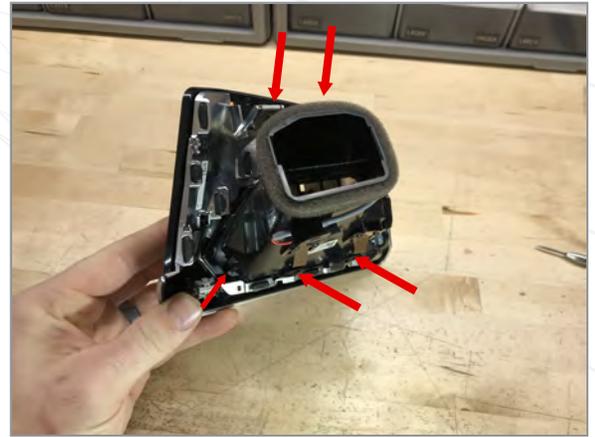

2 Release all 5 vent trim clips as shown



3 Release four clips to remove vent slat assembly



4 Remove top two vent slats from vent assembly as shown.

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



5 ***OPTIONAL** Use a small screwdriver to remove the directional control fork.


**If not transferring vertical control assembly skip to step 11*




6 ***OPTIONAL** Remove the slider off of the middle slat and install it onto the lower slat




For additional install information please visit www.p3gauges.com/install

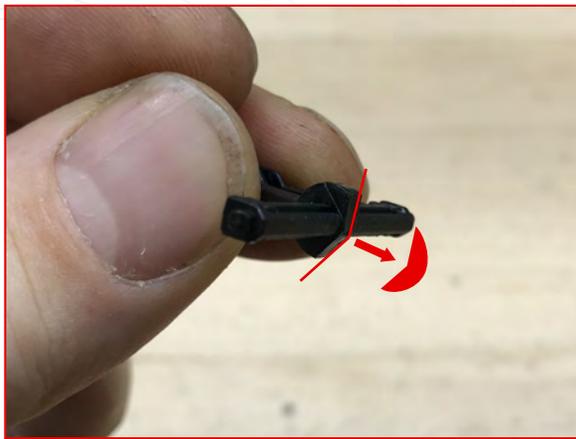

7 *OPTIONAL Cut the fork as shown

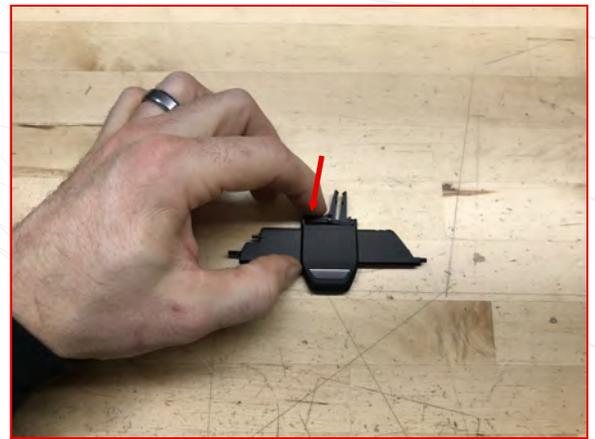

8 *OPTIONAL Reinstall the fork onto the slider as shown

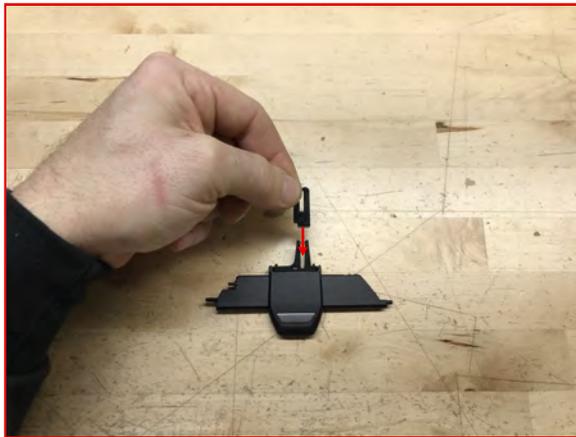

9 *OPTIONAL The included fork extension will clip into the existing fork




10 *OPTIONAL Ensure that the fork extension is seated correctly as shown

WARRANTY & LIABILITY:
Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.




11 Install lower slat with or without slider and display into vent slat assembly

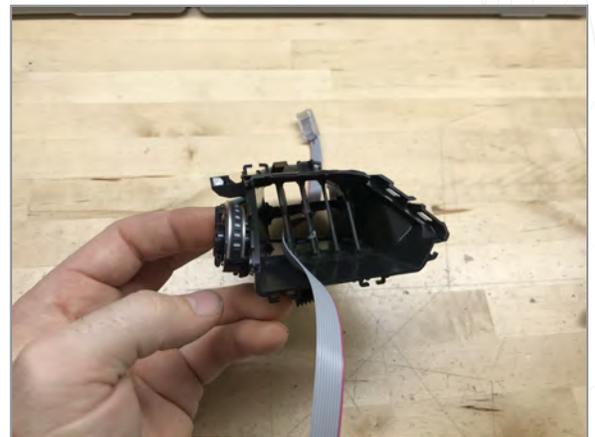


12 Feed the display cable through the vent to the left side of the furthest left vertical slat




For additional install information please visit www.p3gauges.com/install

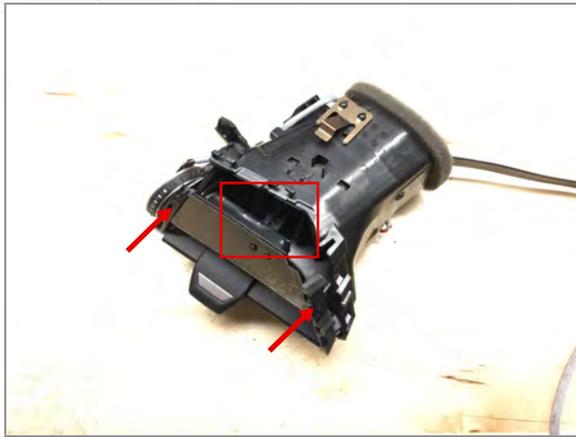

13 If reusing slider, make sure fork extension engages proper vertical slat. Slide slat assembly into vent housing

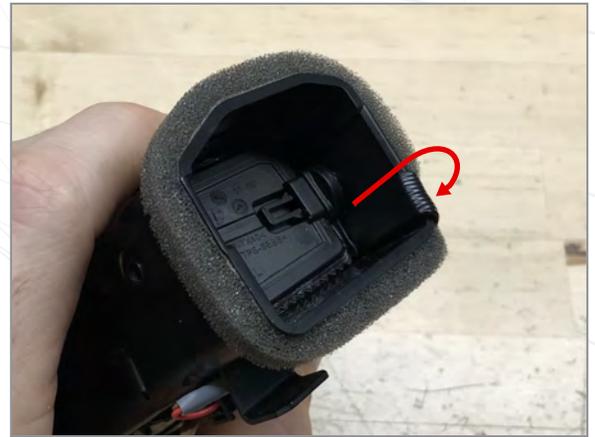

14 Fold the display cable around the back of the vent. Close air flap to hold display cable in place during installation

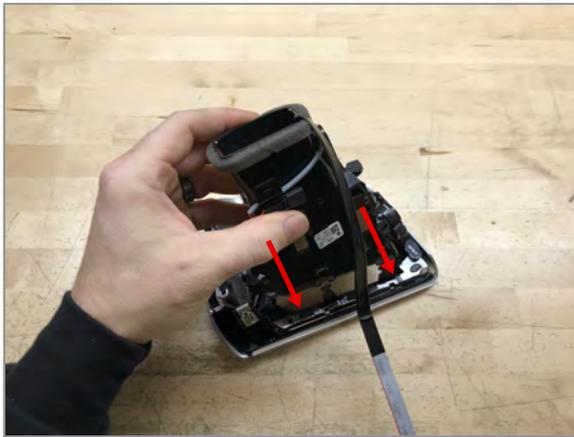

15 Reinstall trim to vent housing, ensuring that all clips are properly seated

WARRANTY & LIABILITY: Neither P3 Cars, nor its dealers or agents shall be liable in any way, for any damage, loss, injury or other claims, resulting from the installation or use of this product. By purchasing or installing this product, you assume all liability of any kind connected with the use and/or application of this product. If you are unsure that you can safely install and use this product, consult a qualified installer or mechanic. The warranty on this product covers only the product itself for a period of 6 months from the date of purchase, and it will be at our discretion to repair or replace the affected parts. No user serviceable parts inside. Warranty will be voided if product shows physical damage.



You can now install the gauge into your vehicle.